




INA BRAINGS SALES JAPAN CO.,LTD.

100 mm x 150 mm x 24 mm NTN 6020LLU deep groove ball bearings

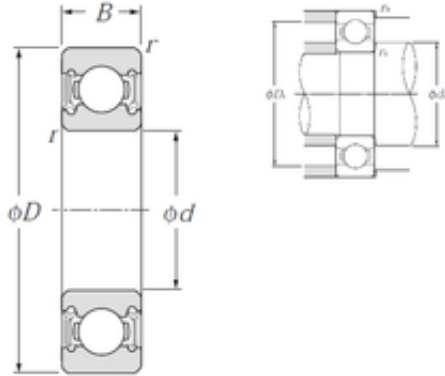

Bearing No. 6020LLU

6020LLU Bearing 2D drawings and 3D CAD models

Size	100x150x24 mm
Bore Diameter	100 mm
Outer Diameter	150 mm
Width	24 mm
d	100 mm
D	150 mm
B	24 mm
C	24 mm
r min.	1,5 mm
da min.	108 mm
da max	110 mm
Da max.	142 mm
ra max.	1,5 mm
Weight	1,15 Kg
Basic dynamic load rating (C)	60 kN
Basic static load rating (C0)	54 kN
Reference speed	2 600 r/min
Category	Single Row Ball Bearings
Inventory	0.0
Manufacturer Name	NTN
Minimum Buy Quantity	N/A
Weight / Kilogram	1.262
EAN	4547359004359
Product Group	B00308
Enclosure	2 Seals



INA BRAINGS SALES JAPAN CO.,LTD.

Precision Class	ABEC 1 ISO P0
Maximum Capacity / Filling Slot	No
Rolling Element	Ball Bearing
Snap Ring	No
Internal Special Features	No
Cage Material	Steel
Enclosure Type	Contact Seal
Internal Clearance	C0-Medium
Inch - Metric	Metric
Long Description	100MM Bore; 150MM Outside Diameter; 24MM Outer Race Width; 2 Seals; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features; C0-Medium Internal Clearance; Steel Cage
Other Features	Deep Groove Double Lip Friction Nitrile Rubber Seal -20 To 120 Deg C
Category	Single Row Ball Bearing
UNSPSC	31171504
Harmonized Tariff Code	8482.10.50.68
Noun	Bearing
Keyword String	Ball
Manufacturer URL	http://www.ntnamerica.com
Manufacturer Item Number	6020LLU
Weight / LBS	2.76
Outer Race Width	0.945 Inch 24 Millimeter
Bore	3.937 Inch 100 Millimeter
Outside Diameter	5.906 Inch 150 Millimeter
Inner Race Width	0 Inch 0 Millimeter
bore diameter:	100 mm



INA BRAINGS SALES JAPAN CO.,LTD.

precision rating:	ISO Class 0
outside diameter:	150 mm
finish/coating:	Uncoated
overall width:	24 mm
bearing material:	High Carbon Chrome Steel
bore type:	Round
cage material:	Steel
closure type:	Double Sealed
inner ring width:	24 mm
row type & fill slot:	Single Row Non-Fill Slot
outer ring width:	24 mm
snap ring included:	Without Snap Ring
maximum rpm (grease):	2600 rpm
internal clearance:	CN
fillet radius:	1.5 mm
operating temperature range:	-40 to 120 ° C
maximum rpm:	5000 RPM
dynamic load capacity:	60000 N
series:	60
static load capacity:	54000 N
manufacturer product page:	Click here