




INA BRAINGS SALES JAPAN CO.,LTD.

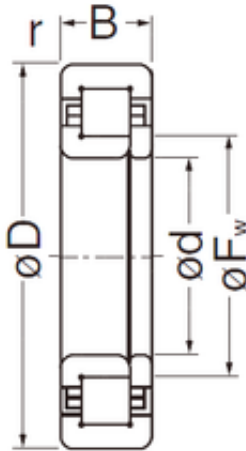

50 mm x 90 mm x 20 mm NACHI NUP210EG cylindrical roller bearings

Bearing No. NUP210EG

NUP210EG Bearing 2D drawings and 3D CAD models

Size	50x90x20 mm
Bore Diameter	50 mm
Outer Diameter	90 mm
Width	20 mm
d	50 mm
Fw	59,5 mm
D	90 mm
B	20 mm
C	20 mm
r min.	1,1 mm
r1 min.	1,1 mm
Weight	0,49 Kg
Basic dynamic load rating (C)	69 kN
Basic static load rating (C0)	76,5 kN
(Grease) Lubrication Speed	6400 r/min
Configuration	Single Row
Enclosure	Open
Bore Type	Cylindrical Bore
Bore Size	50 mm
Outside Diameter	90 mm
Width	20 mm
Fillet Radius/Chamfer	1.1 mm
Inside Ring Outside Diameter	59.5 mm
r1	1.1 mm



INA BRAINGS SALES JAPAN CO.,LTD.

Dynamic Load Rating	69,000 N
Static Load Rating	76,500 N
Limiting Speed - Grease	6,400 rpm
Limiting Speed - Oil	7,700 rpm
Radial Clearance	0.030 to 0.060 mm
db (min)	57 mm
db (max)	58 mm
dc (min)	62 mm
dd (min)	67 mm
Da (max)	83 mm
ra (max)	1 mm
ra1 (max)	1 mm