




INA BRAINGS SALES JAPAN CO.,LTD.

65 mm x 140 mm x 33 mm NTN 6313ZZ deep groove ball bearings

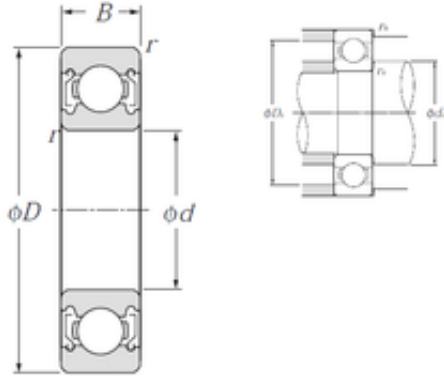

6313ZZ Bearing 2D drawings and 3D CAD models

Bearing No. 6313ZZ

Size	65x140x33 mm
Bore Diameter	65 mm
Outer Diameter	140 mm
Width	33 mm
d	65 mm
D	140 mm
B	33 mm
C	33 mm
rn	0,5 mm
r min.	2,1 mm
da min.	76 mm
da max	86 mm
Da max.	129 mm
ra max.	2 mm
Weight	2,08 Kg
Basic dynamic load rating (C)	92,5 kN
Basic static load rating (C0)	60 kN
(Grease) Lubrication Speed	4 900 r/min
Category	Single Row Ball Bearings
Inventory	0.0
Manufacturer Name	NTN
Minimum Buy Quantity	N/A
Weight / Kilogram	2.03
EAN	4547359005769
Product Group	B00308



INA BRAINGS SALES JAPAN CO.,LTD.

Enclosure	2 Metal Shields
Precision Class	ABEC 1 ISO P0
Maximum Capacity / Filling Slot	No
Rolling Element	Ball Bearing
Snap Ring	No
Internal Special Features	No
Cage Material	Steel
Internal Clearance	C0-Medium
Inch - Metric	Metric
Long Description	65MM Bore; 140MM Outside Diameter; 33MM Outer Race Diameter; 2 Metal Shields; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features
Category	Single Row Ball Bearing
UNSPSC	31171504
Harmonized Tariff Code	8482.10.50.68
Noun	Bearing
Keyword String	Ball
Manufacturer URL	http://www.ntnamerica.com
Manufacturer Item Number	6313ZZ
Weight / LBS	4.464
Outside Diameter	5.512 Inch 140 Millimeter
Outer Race Width	1.299 Inch 33 Millimeter
Bore	2.559 Inch 65 Millimeter
Other Features	Deep Groove Shell Alvania Prelubricated
Inner Race Width	0 Inch 0 Millimeter
bore diameter:	65 mm
precision rating:	ISO Class 0
outside diameter:	140 mm



INA BRAINGS SALES JAPAN CO.,LTD.

finish/coating:	Uncoated
overall width:	33 mm
bearing material:	High Carbon Chrome Steel
bore type:	Round
cage material:	Steel
closure type:	Double Shielded
inner ring width:	33 mm
row type & fill slot:	Single Row Non-Fill Slot
outer ring width:	33 mm
snap ring included:	Without Snap Ring
maximum rpm (grease):	4900 rpm
internal clearance:	CN
fillet radius:	2.1 mm
operating temperature range:	-40 to 120 ° C
maximum rpm:	5800 RPM
dynamic load capacity:	92500 N
series:	63
static load capacity:	60000 N
manufacturer product page:	Click here